

SlideView Pre-Fabricated Doors

Corsair®
GLIDING PATIO DOOR

Builder®
PRIME PATIO DOOR

Performer®
SLIDING PATIO DOOR

Remodeler®
REPLACEMENT PATIO DOOR

SwingView®
HINGED SWINGING DOOR



DCAT-61520



VEKA Inc.

www.vekainc.com • 800 654 5589 • Pennsylvania • Nevada • Texas • N. Carolina • Canada



- I. Features
- II. Performance Data
- III. Configurations
- IV. Glass/Screen Sizing Charts



Standard Features

- Multi-point locking hardware
- Welded sash (*individually boxed for shipping*)
- Mechanical frame (*boxed for shipping*)
- Colors: White, Beige, Clay
- Internal weep system
- Mild steel adjustable tandem rollers, lock and striker
- Keyed lock cylinder
- XO, OX, OXO, OXXO configurations
- Aluminum reinforcing
- White/beige/clay hardware finish
- Accommodates 1.25" glazing
- Dual seal weatherstripping
- Exterior or interior glazed options
- Aluminum screen track
- Aluminum threshold cover
- Flexible PVC bumpers
- FGIA approved PVC lineal certification
- NFRC simulations



Optional Features

- FeneXseal sealant strip in sill
- Various glass aesthetics as per distributor
- Sliding screens available as per distributor
- Wood grain and color laminates available
- Brass, satin nickel or black handle finish
- Stainless steel adjustable tandem rollers, lock and striker







VEKA Inc.

www.vekainc.com • 800 654 5589 • Pennsylvania • Nevada • Texas • N. Carolina • Canada

Air Infiltration	.14 cfm/ft ²
Water Resistance	7.50 psf
Uniform Load Structural	+/- 75.00 psf
Rating	DP50
Clear	.47
Low E	.30
Dual Low E/ Argon	.23



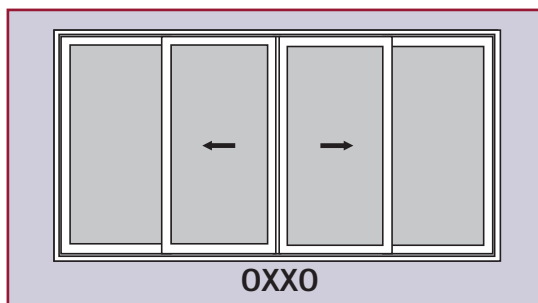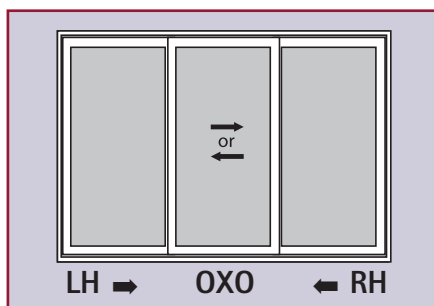

Standard hardware includes:
mild steel dual point lock and keeper
with a color matched handle set.

Please specify for laminated doors.

Sliding Door (2-Panel)	Glass Size	Screen Size
5'0" x 6'8" (X0-OX)	24-1/2" x 70-1/16"	28-15/16" x 77-1/16"
5'0" x 8'0" (X0-OX)	24-1/2" x 86-1/16"	28-15/16" x 93-1/16"
6'0" x 6'8" (X0-OX)	30-1/2" x 70-1/16"	34-15/16" x 77-1/16"
6'0" x 6'8" (X0-OX)	30-1/2" x 86-1/16"	34-15/16" x 93-1/16"
8'0" x 6'8" (X0-OX)	42-1/2" x 70-1/16"	46-15/16" x 77-1/16"
8'0" x 8'0" (X0-OX)	42-1/2" x 86-1/16"	46-15/16" x 93-1/16"

Sliding Door (3-Panel)	Glass Size	Screen Size
9'0" x 6'8" (OXO)	30-3/8" x 70-1/16"	35-3/16" x 77-1/16"
9'0" x 8'0" (OXO)	30-3/8" x 86-1/16"	35-3/16" x 93-1/16"

Sliding Door (4-Panel)	Glass Size	Screen Size
12'0" x 6'8" (OXXO)	30-13/16" x 70-1/16"	35-11/16" x 77-1/16"
12'0" x 8'0" (OXXO)	30-13/16" x 86-1/16"	35-11/16" x 93-1/16"





- I. Features
- II. Performance Data
- III. Glass/Screen Sizing Charts
- IV. Configurations



VEKA Inc.

www.vekainc.com • 800 654 5589 • Pennsylvania • Nevada • Texas • N. Carolina • Canada

Standard Features

- White, Beige, Clay handle set
- Dual point locking hardware
- All-welded frame and sash
- Colors: White, Beige, Clay
- Internal weep system
- Plated steel adjustable tandem rollers, lock and striker
- Keyed lock cylinder
- New construction nail fin
- Field Reversible (XO,OX)
- OXO configurations available
- 16 gauge steel reinforcing
- Accommodates 3/4" glazing
- Dual seal weatherstripping
- Exterior glazed
- Integral screen track
- Vinyl threshold cover
- FGIA approved PVC lineal certification
- NFRC simulations
- Energy Star® Partner



Optional Features

- Brass or Satin Nickel handle finished
- Wood grain and color laminates available
- Various glass aesthetics as per distributor package
- Sliding screens available as per distributor

Integral NC Nailing Fin


All-Welded Frame and Sash

Accommodates 1" Glazing

Exterior Glazed

Integral Screen Track

Multi-Chambered Interior Walls

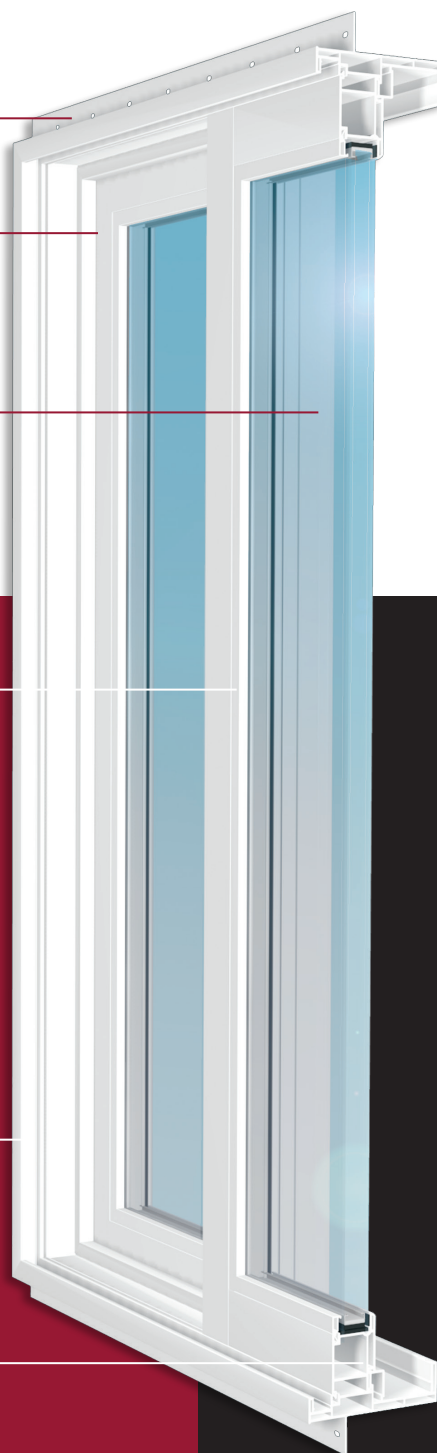

VEKA Inc.

www.vekainc.com • 800 654 5589 • Pennsylvania • Nevada • Texas • N. Carolina • Canada

Air Infiltration	.12 cfm/ft ²
Water Resistance	5.25 psf
Uniform Load Structural	+/- 52.5 psf
Rating	SGD - R35
Clear	.49
Low E	.32
Low E/ Argon	.28







Sliding Door	Glass Size
5'0" x 6'8" (X0-OX)	27-3/16" x 73-7/8"
6'0" x 6'8" (X0-OX)	33-3/16" x 73-7/8"
8'0" x 6'8" (X0-OX)	45-3/16" x 73-7/8"
9'0" x 6'8" (OXO)	33-9/16" x 73-7/8"

Sliding Door	Screen Size
5'0" x 6'8" (X0-OX)	29-3/4" x 78-3/16"
6'0" x 6'8" (X0-OX)	35-3/4" x 78-3/16"
8'0" x 6'8" (X0-OX)	47-3/4" x 78-3/16"
9'0" x 6'8" (OXO)	36-15/16" x 78-3/16"



Sliding Door XO, OX, OXO, OXXO

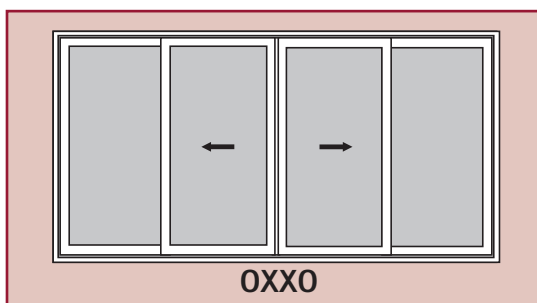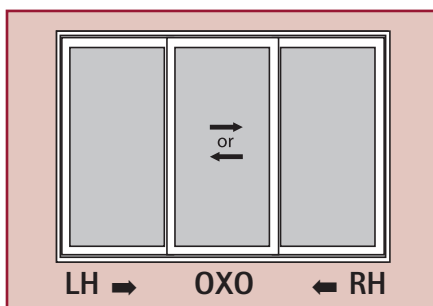



- I. Features
- II. Performance Data
- III. Configurations
- IV. Glass/Screen Sizing Chart




VEKA Inc.

www.vekainc.com • 800 654 5589 • Pennsylvania • Nevada • Texas • N. Carolina • Canada

Standard Features

- Multi-point locking hardware
- All-welded frame and sash
- Colors: White, Beige, Clay
- Internal weep system
- Stainless steel adjustable tandem rollers, lock and striker
- Keyed lock cylinder
- New construction nail fin
- Integral J-channel
- Field Reversible
- XO, OX, OXO configurations
- 12 gauge steel reinforcing
- White, beige or clay hardware finish
- Accommodates 1" glazing
- Dual seal weatherstripping
- Exterior glazed
- Integral screen track
- Vinyl threshold cover
- FGIA approved PVC lineal certification
- NFRC simulations
- Energy Star® Partner

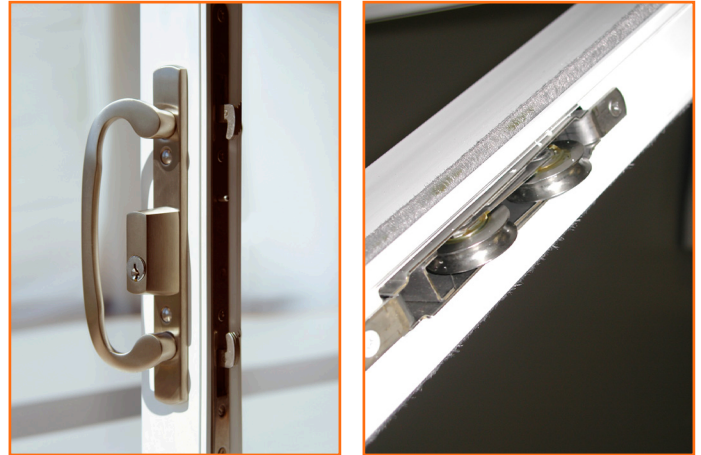

Optional Features

- Brass or Satin Nickel hardware
- Wood grain and color laminates available
- Various glass aesthetics as per distributor
- Sliding screens available as per distributor

Integral NC Nailing Fin

Integral J- Channel

All-Welded Frame and Sash

Exterior Glazed

Integral Screen Track

Multi-Chambered Interior Walls







VEKA Inc.

www.vekainc.com • 800 654 5589 • Pennsylvania • Nevada • Texas • N. Carolina • Canada

Air Infiltration	.08 cfm/ft ²
Water Resistance	7.5 psf inswing
Uniform Load Structural	+/- 75.0 psf
Clear/Argon	0.49
Low E/Argon	0.28
Rating	SGD - LC50



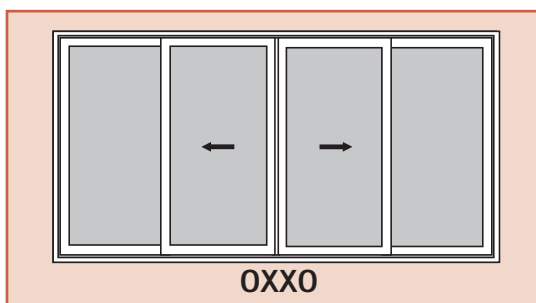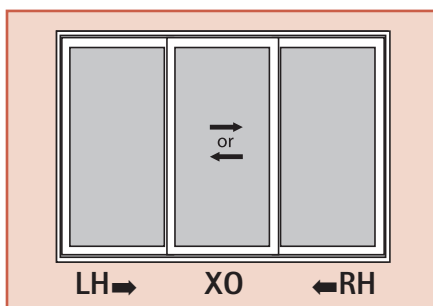

Standard hardware includes:
stainless steel dual point lock and
keeper with a color matched handle
set.

Sliding Door	Glass Size
5'0" x 6'8" (X0-0X)	26-9/16" x 72-9/16"
6'0" x 6'8" (X0-0X)	32-9/16" x 72-9/16"
8'0" x 6'8" (X0-0X)	44-9/16" x 72-9/16"
9'0" x 6'8" (0X0)	33-3/16" x 72-9/16"

Sliding Door	Screen Size
5'0" x 6'8" (X0-0X)	29-3/4" x 77-3/8"
6'0" x 6'8" (X0-0X)	35-3/4" x 77-3/8"
8'0" x 6'8" (X0-0X)	47-3/4" x 77-3/8"
9'0" x 6'8" (0X0)	35-5/8" x 77-3/8"





- I. Features
- II. Performance Data
- III. Configurations
- IV. Glass/ Screen Sizing Chart



VEKA Inc.

www.vekainc.com • 800 654 5589 • Pennsylvania • Nevada • Texas • N. Carolina • Canada

Standard Features

- Multi-point locking hardware
- Welded sash (*individually boxed for shipping*)
- Mechanical frame (*boxed for shipping*)
- Colors: White, Beige, Clay
- Internal weep system
- Plated steel adjustable tandem rollers, lock and striker
- Keyed lock cylinder
- Field Reversible
- XO, OX configurations
- Three lights accomplished with mull applied flanker
- 12 gauge steel reinforcing
- White/beige/clay hardware finish
- Accommodates 1" glazing
- Dual seal weatherstripping
- Exterior glazed
- Integral screen track
- Vinyl threshold cover
- Flexible PVC bumpers
- FGIA approved PVC lineal certification
- NFRC simulations



Optional Features

- Brass, Satin Nickel hardware
- Wood grain and color laminates available
- Various glass aesthetics as per distributor
- Sliding screens available as per distributor

Mechanically Assembled Frame

All-Welded Sash

Exterior Glazed

Accommodates 1" Glazing

Integral Screen Track

12 Gauge Steel Reinforcement

Integral Roller Track







VEKA Inc.

www.vekainc.com • 800 654 5589 • Pennsylvania • Nevada • Texas • N. Carolina • Canada

Air Infiltration	.11 cfm/ft ²
Water Resistance	7.50 psf
Uniform Load Structural	+/- 75.0 psf
Rating	SD - R50
Clear	.47
Low E	.33
Low E/ Argon	.29



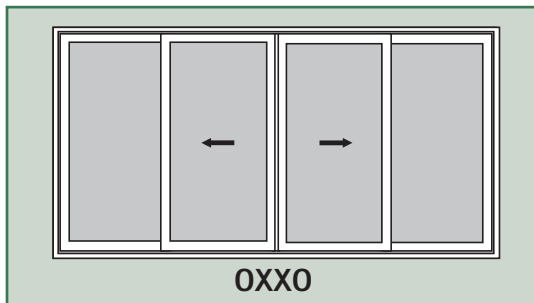

Three light doors accomplished using a two panel door and a mulled flanker.

Standard hardware includes: mild steel dual point lock and keeper with a color matched handle set.



VEKA Inc.

www.vekainc.com • 800 654 5589 • Pennsylvania • Nevada • Texas • N. Carolina • Canada

Sliding Door	Glass Size
5'0" x 6'8" (X0-OX)	26-5/16" x 73-3/8"
6'0" x 6'8" (X0-OX)	32-5/16" x 73-3/8"
8'0" x 6'8" (X0-OX)	44-5/16" x 73-3/8"

Sliding Door	Screen Size
5'0" x 6'8" (X0-OX)	29-3/4" x 77-3/4"
6'0" x 6'8" (X0-OX)	35-3/4" x 77-3/4"
8'0" x 6'8" (X0-OX)	47-3/4" x 77-3/4"





- I. Features and Benefits
- II. Order Forms
 - Inswing
 - Outswing
- III. Glass Blocking Diagram
- IV. Installation Instructions
- V. Warranties



VEKA Inc.

www.vekainc.com • 800 654 5589 • Pennsylvania • Nevada • Texas • N. Carolina • Canada

Standard Features


- Available in in or outswing
- All-welded frame and sash
- Internal weep system
- Standard 5" door panel
- 4 9/16" frame
- 3-point, stainless steel locking system with deadbolt
- Brick mould
- Brass or white hardware finish
- 3-way, 4" adjustable hinges
- 1" glazing
- Dual seal weatherstripping
- .100" vinyl wall thickness
- Aluminum reinforced frame, sash, astragal and mulls for rigidity
- Anodized aluminum sill cover with integral rolling track for optional sliding screen
- Sash drip cap/hood for water diversion
- Colors: White, Beige, Clay
- Center shootbolts on two-panel french door
- Moveable mullion for french swing door application
- FGIA approved PVC lineal certification
- NFRC simulations



Optional Features

- Wood grain and color laminates available
- Various glass aesthetics as per end user package
- Screens supplied by others



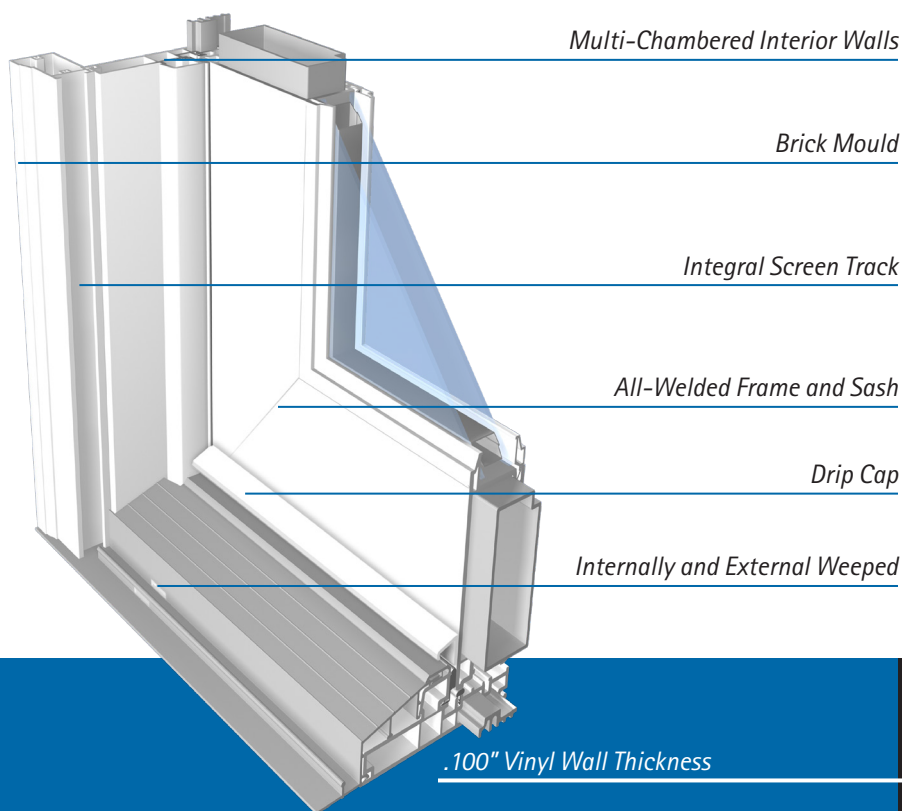

.100" Vinyl Wall Thickness


Aluminum Reinforced Frame and Sash

Accommodates 1" Glazing

Internally Glazed

Optional Interior Woodgrain Laminates

Anodized Aluminum Sill Cover


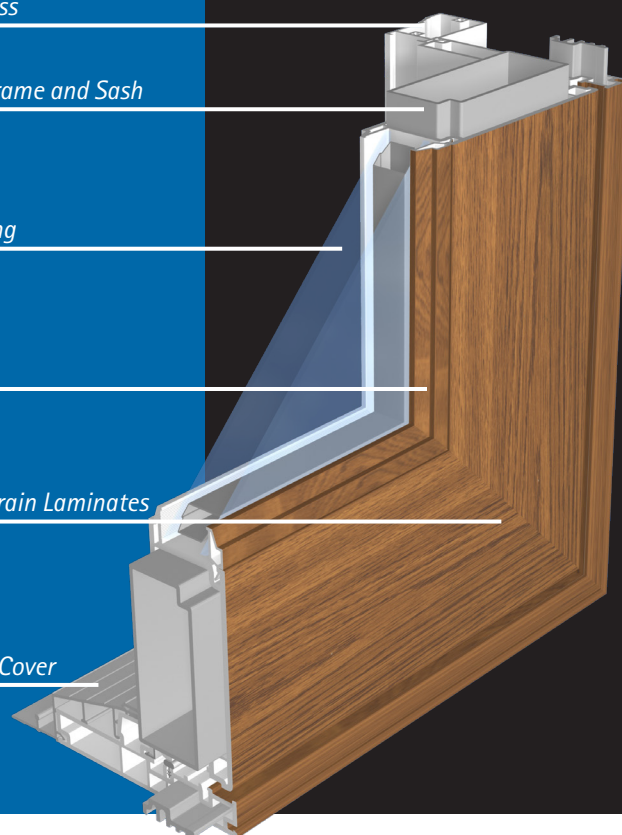


VEKA Inc.

www.vekainc.com • 800 654 5589 • Pennsylvania • Nevada • Texas • N. Carolina • Canada

Air Infiltration	.07 cfm/ft ²
Water Resistance up to	7.5 psf outswing LW (limited water) inswing
Uniform Load Structural up to	±75.0 psf
Clear/Argon	0.50
Low E/Argon	0.39
HGD up to	R-PG50 SHA



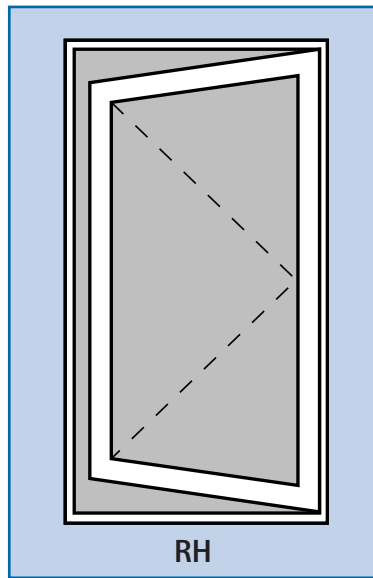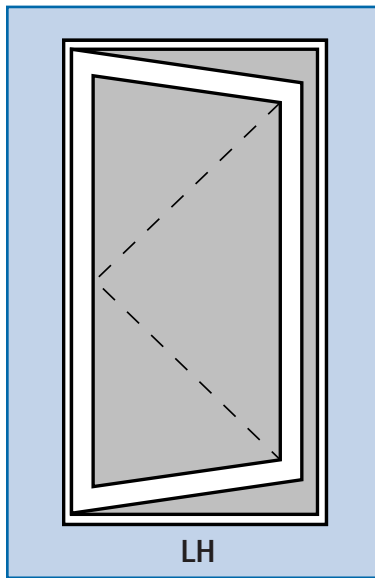

Inswing as viewed from exterior

Standard Features

- 4-9/16" frame
- 3-point locking system with deadbolt
- Brick mould
- Brass or white hardware finish
- 3-way, 4" adjustable hinges
- 1" glazing
- Dual seal weatherstripping
- 0.100" vinyl wall thickness
- Aluminum reinforced frame and sash

Laminates

Interior

- Natural Oak (03)
- Hillside Oak (05)
- Cavalier Oak (08)



Exterior

Minimum order quantity
may be required



VEKA Inc.

www.vekainc.com • 800 654 5589 • Pennsylvania • Nevada • Texas • N. Carolina • Canada

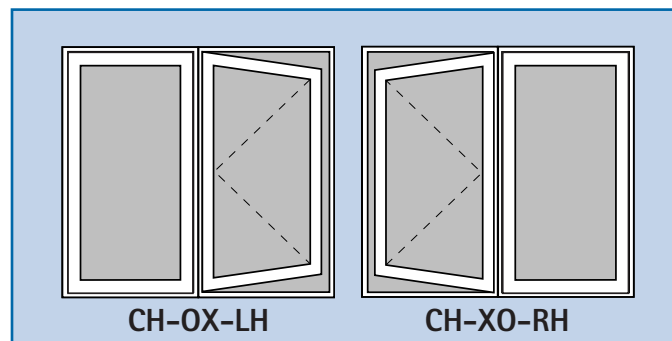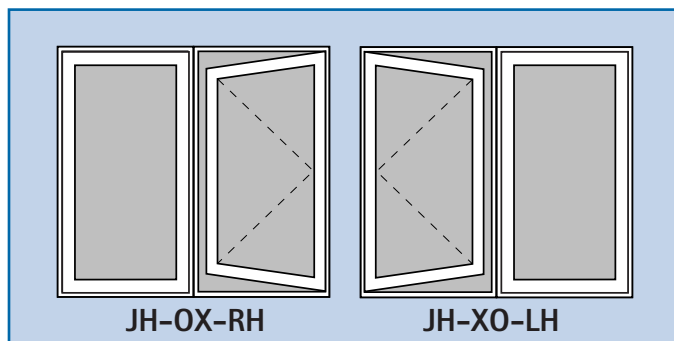

Inswing as viewed from exterior

Standard Features

- 4-9/16" frame
- 3-point locking system with deadbolt
- Brick mould
- Brass or white hardware finish
- 3-way, 4" adjustable hinges
- 1" glazing
- Dual seal weatherstripping
- 0.100" vinyl wall thickness
- Aluminum reinforced frame and sash

Laminates

Interior

- Natural Oak (03)
- Hillside Oak (05)
- Cavalier Oak (08)







Exterior

Minimum order quantity
may be required



VEKA Inc.

www.vekainc.com • 800 654 5589 • Pennsylvania • Nevada • Texas • N. Carolina • Canada

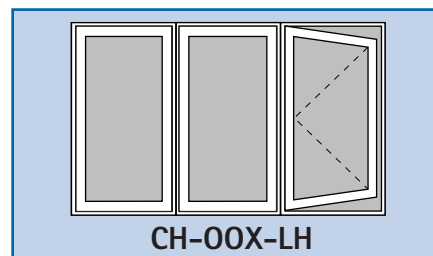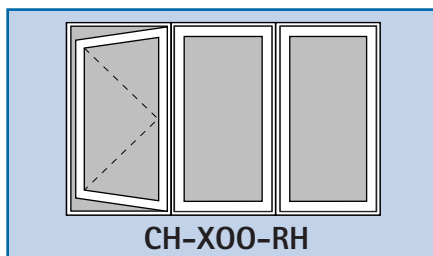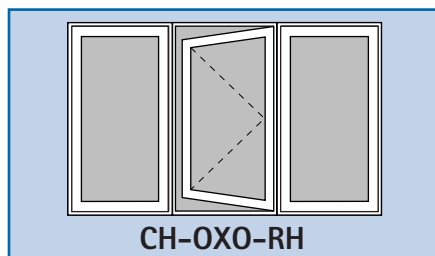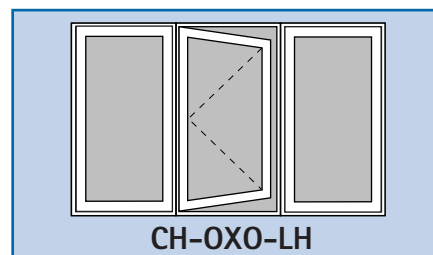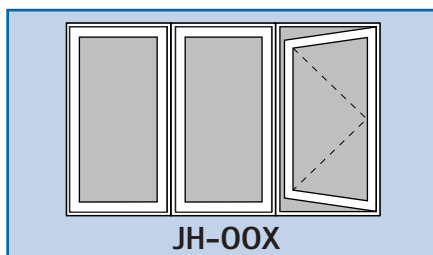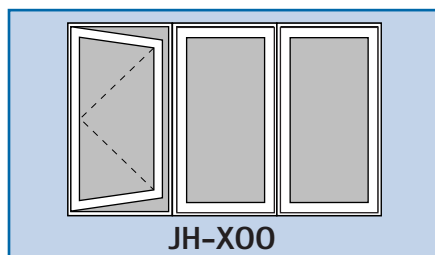

Inswing as viewed from exterior

Standard Features

- 4-9/16" frame
- 3-point locking system with deadbolt
- Brick mould
- Brass or white hardware finish
- 3-way, 4" adjustable hinges
- 1" glazing
- Dual seal weatherstripping
- 0.100" vinyl wall thickness
- Aluminum reinforced frame and sash

Laminates

Interior

- Natural Oak (03)
- Hillside Oak (05)
- Cavalier Oak (08)



Exterior

Minimum order quantity
may be required



VEKA Inc.

www.vekainc.com • 800 654 5589 • Pennsylvania • Nevada • Texas • N. Carolina • Canada

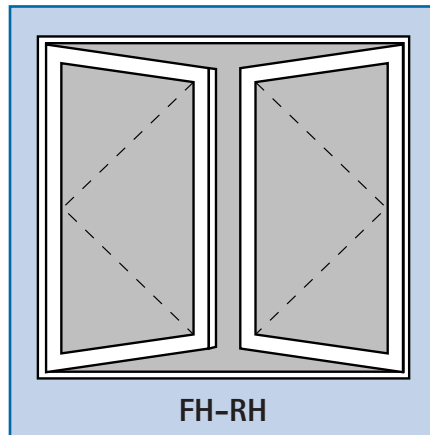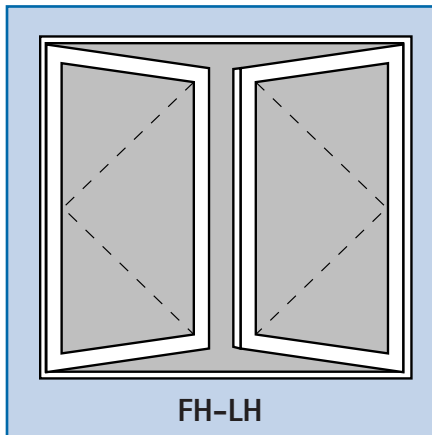

Inswing as viewed from exterior

CUSTOM SIZING AVAILABLE

Standard Features

- 4-9/16" frame
- 3-point locking system with deadbolt
- Brick mould
- Brass or white hardware finish
- 3-way, 4" adjustable hinges
- 1" glazing
- Dual seal weatherstripping
- 0.100" vinyl wall thickness
- Aluminum reinforced frame and sash

Laminates

Interior

- Natural Oak (03)
- Hillside Oak (05)
- Cavalier Oak (08)


Exterior

Minimum order quantity
may be required



VEKA Inc.

www.vekainc.com • 800 654 5589 • Pennsylvania • Nevada • Texas • N. Carolina • Canada

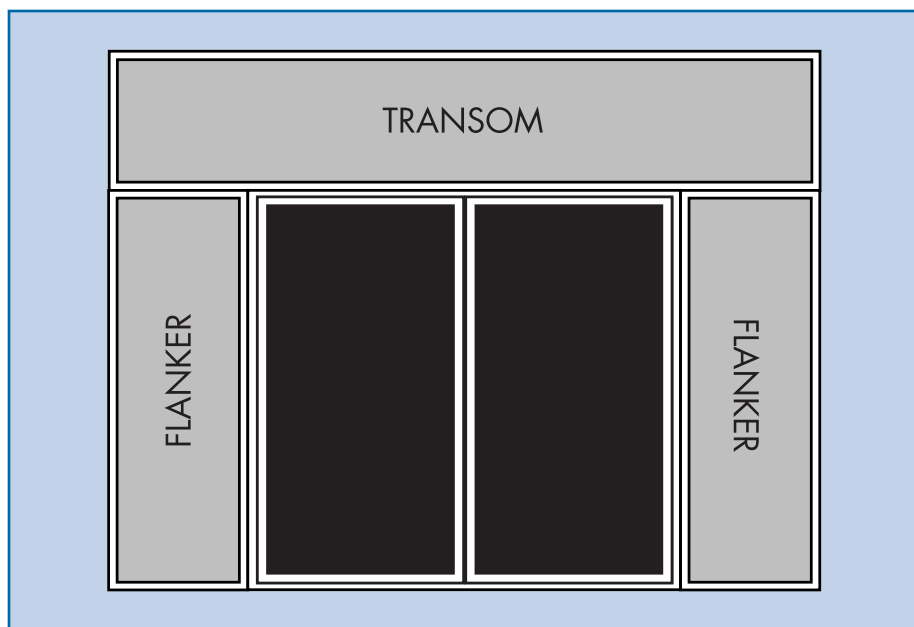

Standard Features

- 4-9/16" frame
- Brick mould
- 1" glazing
- Equal glass (flankers)

Laminates

Interior

- Natural Oak (03)
- Hillside Oak (05)
- Cavalier Oak (08)

Exterior

Minimum order quantity
may be required





VEKA Inc.

www.vekainc.com • 800 654 5589 • Pennsylvania • Nevada • Texas • N. Carolina • Canada

Single Panel Swing Door	Glass Size
3'0" x 6'8" (X)	24-3/4" x 68-3/4"
3'0" x 8'0" (X)	24-3/4" x 84-3/4"
Two Panel Single Swing Door	
5'0" x 6'8" (X0-0X)	19" x 68-3/4"
6'0" x 6'8" (X0-0X)	25" x 68-3/4"
5'0" x 8'0" (X0-0X)	19" x 84-3/4"
6'0" x 8'0" (X0-0X)	25" x 84-3/4"
Two Panel French Hinged Door	
5'0" x 6'8" (XX)	19-5/16" x 68-3/4"
6'0" x 6'8" (XX)	25-5/16" x 68-3/4"
5'0" x 8'0" (XX)	19-5/16" x 84-3/4"
6'0" x 8'0" (XX)	25-5/16" x 84-3/4"
Three Panel Single Swing Door	
9'0" x 6'8"	25-1/16" x 68-3/4"



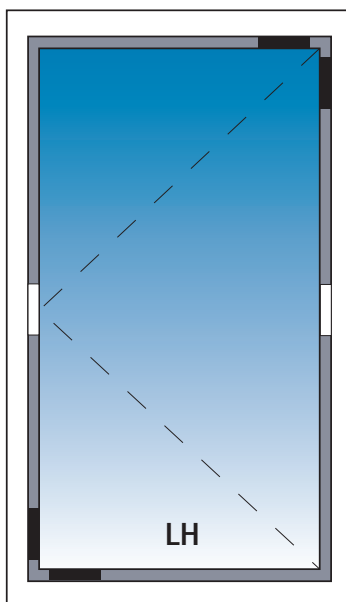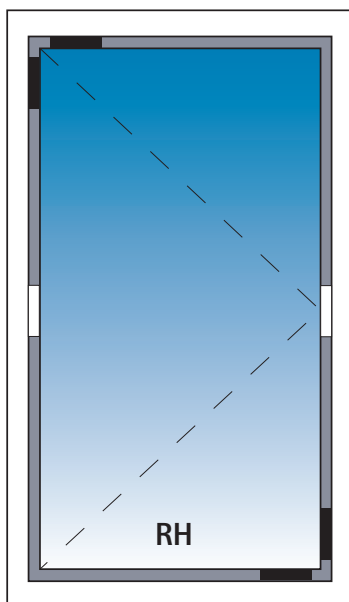

LEGEND

Blocking Shims



Spacing Shims



VEKA Inc.

www.vekainc.com • 800 654 5589 • Pennsylvania • Nevada • Texas • N. Carolina • Canada

Warranties

In the event of a warranty claim:

VEKA should be contacted by the participating KD Door partner to determine the nature of the complaint. At that time, the appropriate party(ies) will be notified of the complaint and the corresponding warranty will apply.

The following warranties are contained within this catalog:

VEKA - Vinyl Profile Warranty

Amesbury/Truth - Lock and Handles Warranty

Roto/Fasco - Tandem Roller Warranty

Vision Hardware - Lock and Keeper Warranty



VEKA Inc.

www.vekainc.com • 800 654 5589 • Pennsylvania • Nevada • Texas • N. Carolina • Canada